P1,P2:	M-Y125A
	M-125A
P3: M-487A	

Customer No:	No: 43

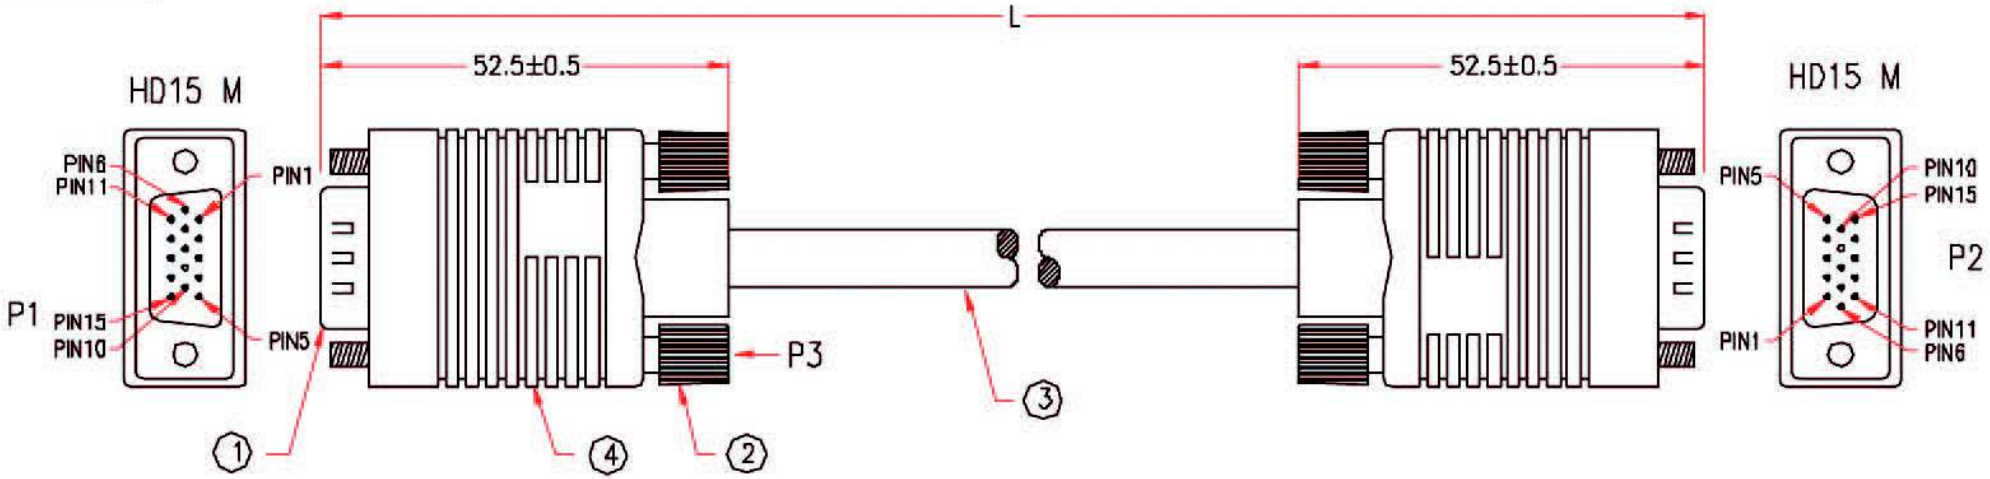

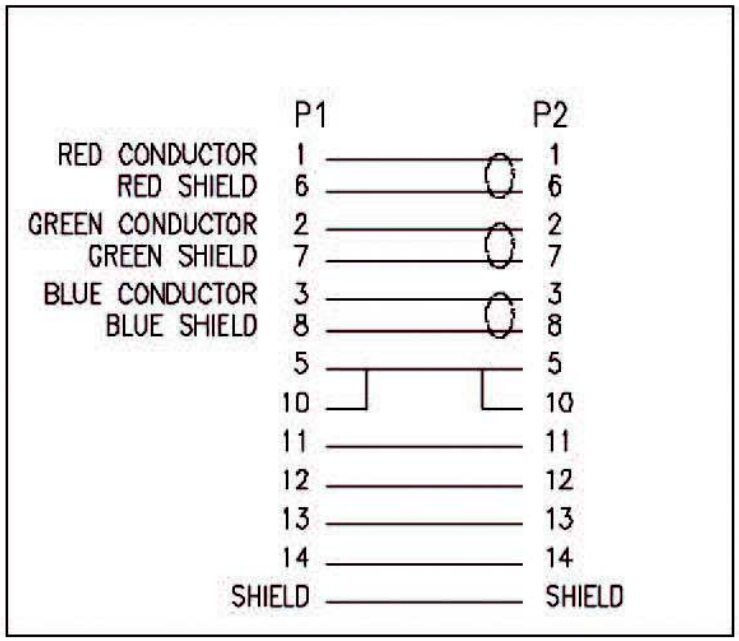

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
4	BLACK PVC TUBE ø3.0*22mm	2	M304
	BLACK HEAT SHRINK TUPE ø3.0*10mm	6	M743
	BLACK HEAT SHRINK TUPE ø1.0*6mm	6	M743
	COPPER FOIL 33*65mm	2	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BEIGE		M304
3	UL2919 ${[28AWG+AL+S(29/0.10mmTS)]*3COAXIAL+(30AWG*5C)},AL+D+AWA BRAID(47%),OD:7.5mm, JACKET BEIGE,	L-20mm	M304
2	MOLDED THUMBSCREW #4-40 4.5*48mm, BEIGE	4	M95
1	HD15 MALE WITHOUT PIN 9, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108

APPROVED			Cable Length Unless Other Spec. Tolerances:	
CHECKED			0 ~200mm	±10mm
DRAWING			201~1000mm	±20mm
			1001 ~1500mm	±25mm
			1501~2100mm	±30mm
			2100mm↑	±40mm
DATE		ITEM NO. CDEX M-M	UNIT:mm	

		CHECKED	